© 2011 UES (INT'L) PTY LTD

Push Button latches

- Push the button to unlatch.
- Locking and non-locking styles available.
- Optional ejector spring helps prevent rattles.

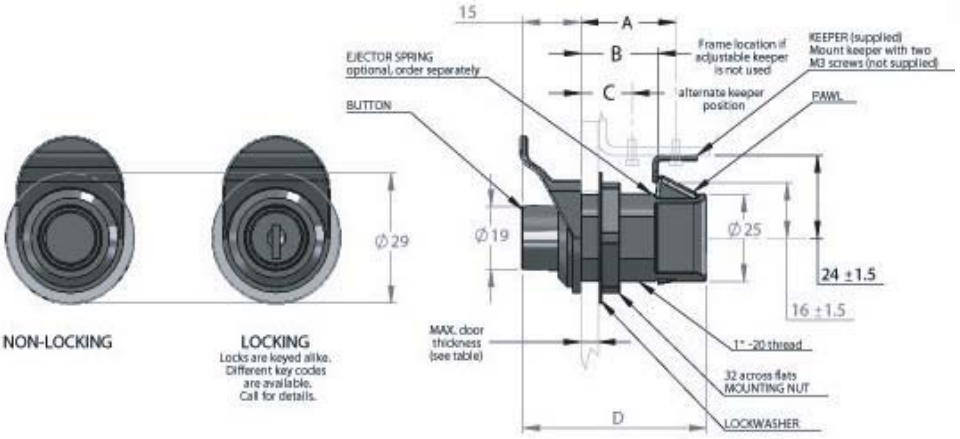

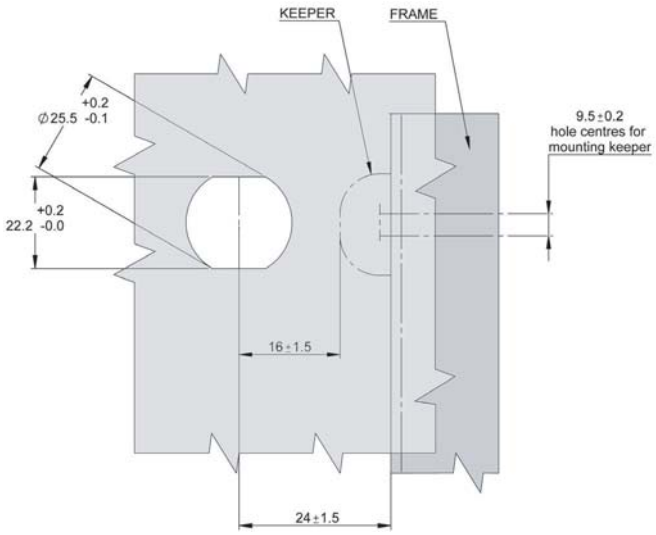

Material and Finish

Housing: Glass reinforced nylon, black. **Pawl:** Acetal black. **Knob and Knob Plug:** Polyester, black. **Lock Plug:** Glass reinforced acetal, black. **Cam:** Glass reinforced nylon/silicone, black. **Internal Springs:** 302 Stainless Steel, natural. **Pull Tab:** Nylon, black or CF-8M Stainless Steel. **Mounting Nut:** Glass reinforced nylon, black. **Lock Washer:** Spring steel, zinc alloy plated. **Keeper:** 304 Stainless Steel, passivated. **Ejector Spring:** 1065 Steel, black organic coating.

Product Strength Guidelines:

Maximum working load: 530 N
Ultimate load: 690 N

Style	Max. door thickness	A	B	C	D
Latch only	12,7	32±1,5	25±0,4	17±1,5	40
Latch with pull tab	10,3	29,5±1,5	$23^{+0,1}_{-0,7}$	14,5±1,5	37

Part Numbers	Keylock	Non -keylock
Pull tab in line with latching pawl	4.93-303	4.93-304
Pull tab perpendicular to latching pawl	4.93-313	4.93-314
Latch only	4.93-307	4.93-308
Ejector spring (if required)	4.93-22-302-18	

HEAD OFFICE
T: +61 02 8887 1200
F: +61 02 8887 1249
E: export@uesint.com

NEW SOUTH WALES
T: +61 02 8787 6500
F: +61 02 8787 6599
E: uesnsw@uesint.com

QUEENSLAND
T: +61 07 3623 5800
F: +61 07 3865 5605
E: uesqld@uesint.com

VICTORIA
T: +61 03 8787 3100
F: +61 03 8787 3101
E: uesvic@uesint.com

SOUTH AUSTRALIA
T: +61 08 8340 1599
F: +61 08 8340 4423
E: uessa@uesint.com

WESTERN AUSTRALIA
T: +61 08 9249 2211
F: +61 08 9249 2022
E: ueswa@uesint.com

NORTHERN TERRITORY
T: +61 08 8946 4500
F: +61 08 8946 4555
E: uesnt@uesint.com

NEW ZEALAND
T: +64 09 633 4019
F: +64 09 633 0249
E: uesnz@uesint.com