


## Moulded Rubber Straps

Cabac moulded rubber straps are manufactured using the highest quality Ethylene Propylene Diene Monomer Rubber. Each finished batch is tested for tensile strength, elongation at breaking point, hardness and ageing. Cabac straps will out-perform similar conventional products; straps stretch to one-half times their original length.

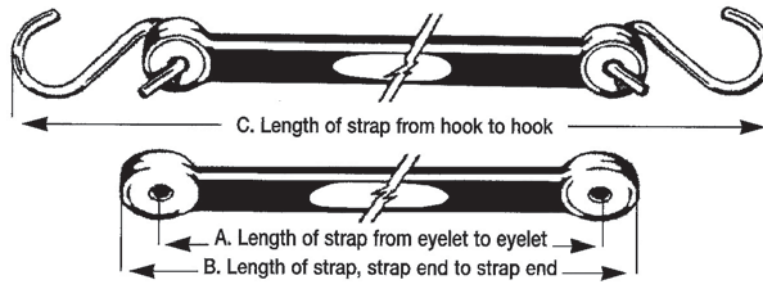

The high quality rubber elastomer in Cabac rubber straps resist the effects of;

- Cracks and abrasions.
- Oxidation.
- Steam.
- Heat and cold.
- Sunlight (u.v stabilised).

'S' hooks used with Cabrac straps are 64mm long (ø 4.7mm) each hook is certified to the following technical data.


**Wire Tensile:** 695MPa

**Load Certification:** 86kg

Product #	6.MRS150	6.MRS350	6.MRS480	6.MRS600	6.MRS710	6.MRS890
Strap Size	150	350	480	600	710	890
Length A	83	219	346	470	565	762
Length B	102	245	372	495	591	787
Length C	159	350	480	600	710	890



## Sponge Rubber Extrusion



Supplied in 30 metre coil.

Part No.	Diameter (mm)	Length (m)
6.P219	4	60
6.P216	5	30
6.P489	6	60
6.P143	7	30
6.P138	10	30
6.P142	12.5	50
6.P144	15	30
6.P498	19	30



HEAD OFFICE	NEW SOUTH WALES	QUEENSLAND	VICTORIA	SOUTH AUSTRALIA	WESTERN AUSTRALIA	NORTHERN TERRITORY	NEW ZEALAND
T: +61 02 8887 1200	T: +61 02 8787 6500	T: +61 07 3623 5800	T: +61 03 8787 3100	T: +61 08 8340 1599	T: +61 08 9249 2211	T: +61 08 8946 4500	T: +64 09 633 4019
F: +61 02 8887 1249	F: +61 02 8787 6599	F: +61 07 3865 5605	F: +61 03 8787 3101	F: +61 08 8340 4423	F: +61 08 9249 2022	F: +61 08 8946 4555	F: +64 09 633 0249
E: export@uesint.com	E: uesnsw@uesint.com	E: uesqld@uesint.com	E: uesvic@uesint.com	E: uessa@uesint.com	E: ueswa@uesint.com	E: uesnt@uesint.com	E: uesnz@uesint.com