

Three Way Rod Latches

This well-proven 'dead-bolt' rod system is equally suitable for vehicle or industrial use. With 9.5mm diameter solid rods and heavy-gauge fabricated steel construction, it will withstand rough treatment and provides full 3-point security.

Latches are supplied complete with guides and keeper, and standard 1143mm rods which can be cut to length by the customer. Note that the system is 'handed', left handed or right handed as illustrated.


Dimensions given will assist in application:

Note that latches are 'handed', and that the keeper must be placed slightly above the line of centre-mechanism.

Special versions are available, with rods made to particular lengths, cranked or tapered. Centre bolt can be removed to provide a 2-way system if desired.

3.3/18238 3-way rod latch complete, right handed.

3.3/18254 3-way rod latch complete, left handed.

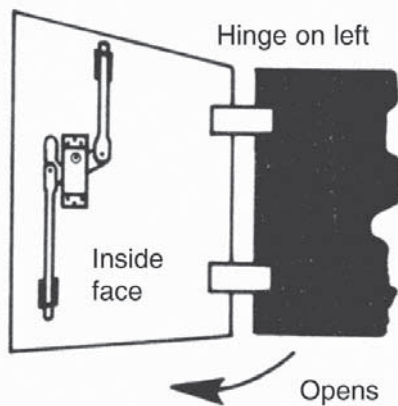

Note on 'handing'

Sketch shows right side latch in position on interior of door which is hinged on its left-hand edge (when viewed from outside). Latches operate identically except for direction of rotation of follow-bush.

Centre latch in 4mm steel construction. Maximum throw of rods 33mm (at top and bottom)

Angle of movement, outside handle 60°.

Finish: Yellow zinc-plated as standard.

